

ProActa Acoustic Flooring Range

ProActa Premium Plus

Technical Information




Description

- a. An acoustic overlay tile/mat for use on both timber and concrete sub-floors
- b. Manufactured from 100% recycled materials
- c. Designed to help reduce both impact and airborne noise from source
- d. Minimises construction height and reduces on-site labour time

Benefits

- a. Independently tested by a UKAS accredited laboratory
- b. Suitable for refurbishment projects
- c. Negates the use of "batten & deck" systems
- d. Quick and simple to install
- e. Comfortable underfoot (carpets can be laid directly on top, without a need for underlayment)

Standard Timber Floor Build

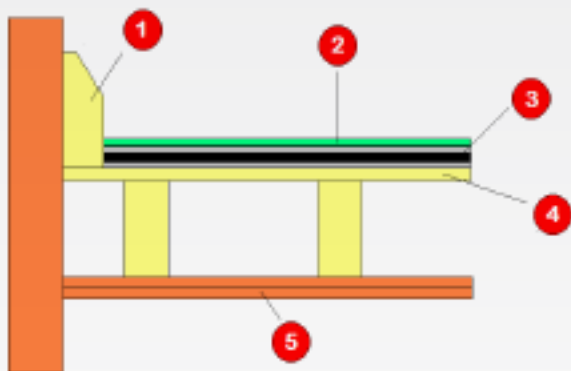

- 1. Skirting Board
- 2. Floor Finish (or timber deck)
- 3. ProActa Premium Plus
- 4. Timber Sub-Floor
- 5. Suspended Ceiling Detail

Acoustic Performance

Sound Insulation (Timber Sub-Floor)

Material	Floor Build	Regulations	Achieved
ProActa Premium Plus (15mm)	18mm T&G Chip ProActa Premium Plus Floorboard Deck Timber Joists Suspended Ceiling	Airborne Sound Insulation (min 43-45dB)	48dB
		Impact Sound Insulation (max 62-64dB)	54dB

Physical Information

- a. Overall Length 1m
- b. Overall Width 1.2m
- c. Overall Depth 15mm



PROACTIVE
ACOUSTIC
S U P P L I E S

Unit A2, Lecturers Close, Bolton, Lancashire, BL3 6DG

Tel: +44 (0)845 241 2560 Fax: +44 (0)845 241 2561

WWW.ACOUSTICS-UK.COM

Proactive Acoustic Supplies is a trading style of Tailored Roofing Systems Ltd